
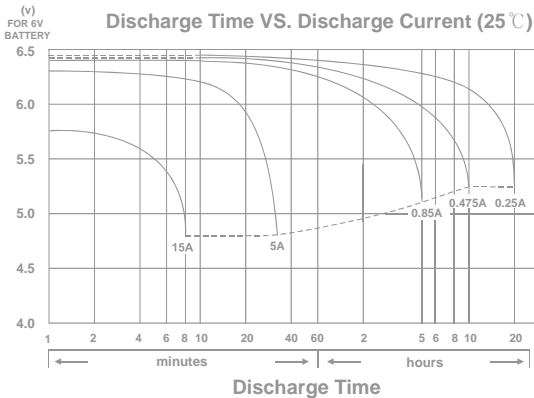
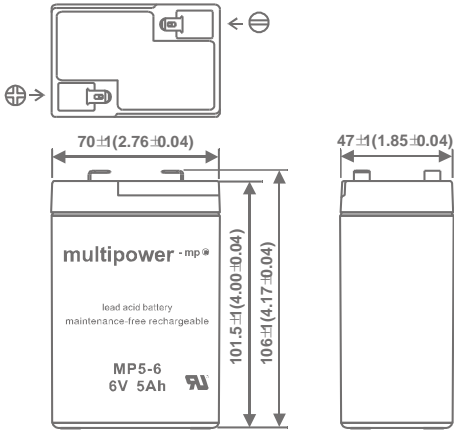


# RECHARGEABLE SEALED LEAD ACID BATTERY

# SPECIFICATION



## MP5-6

**Nominal Voltage (V)** 6V

### Nominal Capacity

20 hour rate	(0.25A	to	5.25V)	5.00Ah
10 hour rate	(0.475A	to	5.25V)	4.75Ah
5 hour rate	(0.85A	to	5.1V)	4.25Ah
1 C	(5A	to	4.8V)	2.83Ah
3 C	(15A	to	4.8V)	2.00Ah

**Weight Approx.** 820g (1.8lbs)

**Internal Resistance (at 1KHz) Approx.** 19 mΩ

### Maximum Discharge Current for

**5 seconds:** 75A

### Charging Methods at 25°C (77°F)

Cycle use:	
Charging Voltage	7.35V to 7.40V
Coefficient -5.0mV/°C/cell	
Maximum Charging Current:	1.5A
Standby use:	
Float Charging Voltage	6.75V to 6.90V
Coefficient -3.0mV/°C/cell	

### Operating Temperature Range

Charge	-15°C (5°F) to 40°C (104°F)
Discharge	-15°C (5°F) to 50°C (122°F)
Storage	-15°C (5°F) to 40°C (104°F)

### Charge Retention (shelf life) at 20°C (68°F)


1 month	92%
3 month	90%
6 month	80%

**Case Material** ABS  
(UL94 HB flame retardant case / cover)


**Terminal** F1 (Faston Tab 187)

## CHARACTERISTIC & PERFORMANCE DATA


Effect of Temperature on Capacity 25°C (77°F)

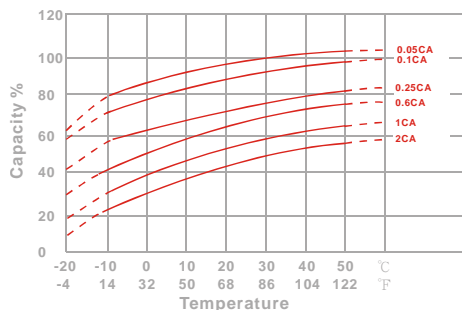


Capacity Retention Characteristic

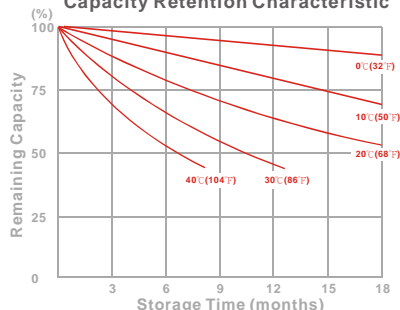

Trickle (or float) Service Life



Cycle Service Life

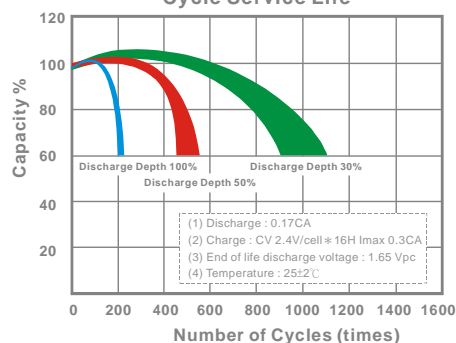

### - PERFORMANCE DATA

Discharge Rates in Watts to Various End Voltages at 25°C (77°F)

End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
5	min	71.5	80.5	87.0	93.0	95.5	98.5	102
10	min	51.0	57.5	61.5	64.5	66.0	67.5	69.0
15	min	42.3	46.7	48.6	49.6	50.0	50.5	51.0
30	min	24.6	27.5	28.6	29.1	29.4	29.8	30.1
60	min	12.6	14.3	15.4	16.3	16.6	17.0	17.2
120	min	7.45	8.30	8.70	9.00	9.15	9.35	9.55
180	min	5.90	6.50	6.80	7.05	7.15	7.30	7.45
240	min	4.80	5.20	5.40	5.55	5.65	5.75	5.85
300	min	4.38	4.68	4.81	4.91	4.96	5.05	5.15
600	min	2.57	2.74	2.82	2.88	2.91	2.94	2.98
1200	min	1.30	1.41	1.50	1.53	1.54	1.56	1.58

### - Discharge Rates in Amperes to Various End Voltages at 25°C (77°F)

End Voltage		1.85V	1.80V	1.75V	1.70V	1.67V	1.65V	1.60V
5	min	15.3	17.6	18.9	19.5	19.7	19.9	20.2
10	min	10.5	11.7	11.9	12.1	12.2	12.3	12.4
15	min	7.86	8.52	9.01	9.22	9.29	9.37	9.45
30	min	4.39	4.94	5.11	5.25	5.30	5.35	5.41
60	min	2.39	2.64	2.76	2.87	2.9	2.94	2.97
120	min	1.34	1.46	1.52	1.56	1.57	1.59	1.61
180	min	1.10	1.16	1.19	1.21	1.22	1.23	1.24
240	min	0.855	0.911	0.936	0.962	0.968	0.975	0.983
300	min	0.790	0.826	0.839	0.851	0.855	0.860	0.866
600	min	0.437	0.464	0.476	0.485	0.489	0.493	0.498
1200	min	0.229	0.243	0.251	0.257	0.260	0.263	0.267

All data on the spec. sheet is an average value:

The tolerance range :  $X < 6\text{min}$  (+15%~-15%),  $6\text{min} \leq X < 10\text{min}$  (+12%~-12%),  $10\text{min} \leq X < 60\text{min}$  (+8%~-8%),  $X \geq 60\text{min}$  (+5%~-5%)